

IAC-08-A3.3.B

ASSESSMENT OF ARCHITECTURAL OPTIONS FOR SURFACE POWER GENERATION AND ENERGY STORAGE ON HUMAN MARS MISSIONS

Mr. Chase Cooper

Massachusetts Institute of Technology (MIT), Cambridge, United States, chase@mit.edu

Mr. Wilfried Hofstetter

Massachusetts Institute of Technology (MIT), Cambridge, United States, wk_hof@mit.edu

Prof. Jeffrey A. Hoffman

Massachusetts Institute of Technology (MIT), Cambridge, United States, jhoffma1@mit.edu

Prof. Edward F. Crawley

Massachusetts Institute of Technology (MIT), Cambridge, United States, crawley@mit.edu

ABSTRACT

The provision of power for human Mars surface exploration is generally assumed to be achieved using nuclear fission power sources, particularly if in-situ production of part or all of the Earth return propellant is considered. This paper provides a comprehensive analysis of surface power generation and energy storage architectures for human Mars surface missions, including tracking and non-tracking photovoltaic power generation, nuclear fission power, dynamic radioisotope power generation, and battery and regenerative fuel cell energy storage. The quantitative analysis is carried out on the basis of equal energy provision to the power system user over one Martian day (including day and night periods); this means that the total amount of energy available to the user will be the same in all cases, but the power profile over the course of the day may be different from concept to concept. The analysis results indicate that solar power systems based on non-tracking, thin-film roll-out arrays with either batteries or regenerative fuel cells for energy storage achieve comparable levels of performance as systems based on nuclear fission power across the entire range of average power levels investigated (up to 100 kW). Given the significant policy and sustainability advantages of solar power compared to nuclear fission power, as well as the significant development and performance increase for thin-film photovoltaic arrays and energy storage technologies that is anticipated over the coming decades, solar power as the primary source for human Mars surface power generation should be seriously considered as alternative to traditional nuclear fission based approaches.

1. INTRODUCTION AND MOTIVATION

The human exploration of Mars is generally considered as the ultimate goal of human spaceflight endeavors in the foreseeable future. Power generation for use on the surface of Mars for habitation and communications, as well as for surface mobility and potentially in-situ propellant production is a key enabling component of human Mars surface exploration.

Past mission architectures and references designs have pre-dominantly relied on nuclear fission power generation, especially if they relied on in-situ production of propellant for Mars ascent and / or TEI [1,2,4,5]. Some design studies have considered photovoltaic power generation as an alternative or secondary option for surface power generation [1,3,10], although usually not for approaches relying on in-situ production of propellants. There have been initial attempts at comprehensive analyses of Mars surface power system architectures [12], but these tend to be limited to parts of the architectural space such as solar power only. What is lacking at present is a comprehensive comparative analysis of nuclear, radioisotope, and solar power architectures; the work presented in this paper is a first attempt to close this gap.

Section 2 provides an overview of the architectural space that was analyzed. Section 3 contains descriptions and assumptions for the different power and energy generation technologies included in the analysis. Section 4 introduces the quantitative modeling approach, and Section 5 contains a discussion of associated results. Section 6 provides a summary of the work presented and important conclusions.

2. SURFACE POWER ARCHITECTURE OPTIONS FOR HUMAN MARS MISSIONS

An enumeration of architectural options was carried out based on three architectural variables: the choice of daytime power generation technology, the choice of eclipse power generation technology, and the energy storage technology (if required); constrained enumeration yields the alternatives shown in Figure 1. Note: for architectures where primary power generation is based on photovoltaic arrays, there is an option for using radioisotope heat sources with thermoelectric or thermodynamic (“dynamic”) power conversion to supply part or all of the nighttime power; these options also may have

different characteristics for contingency operations (e.g. during a global Martian dust storm), because RTG-based architectures are to some degree independent of sunlight and the intensity of insolation.

Architecture	Primary power generation	Secondary power generation	Energy storage
1	Nuclear fission - Stirling cycle	N / A	N / A
2	Nuclear fission - Brayton cycle	N / A	N / A
3	Photovoltaics - tracking	N / A	Li-Ion batteries
4	Photovoltaics - tracking	N / A	Regen. FC
5	Photovoltaics - tracking	Dynamic RTG	Li-Ion batteries
6	Photovoltaics - tracking	Dynamic RTG	Regen. FC
7	Photovoltaics - tracking	Dynamic RTG	N / A
8	Photovoltaics - non-tracking	N / A	Li-Ion batteries
9	Photovoltaics - non-tracking	N / A	Regen. FC
10	Photovoltaics - non-tracking	Dynamic RTG	Li-Ion batteries
11	Photovoltaics - non-tracking	Dynamic RTG	Regen. FC
12	Photovoltaics - non-tracking	Dynamic RTG	N / A
13	Dynamic RTG	N / A	N / A

Figure 1: Architecture options for Mars surface power production

Major metrics considered for the surface power analysis were total power systems mass and volume, captured in normalized form (average power / total system mass [W/kg] or average power / total system volume [W/m³]) The analysis that was carried out for each architecture was an equal energy analysis which assumes that all systems provide the same energy per Martian day, but not necessarily the same continuous power output. I.e. for a nuclear fission based system and a solar-based system, the user receives the same energy per Martian day, but whereas the nuclear system provides a near-constant power output, the solar power system provides the majority of the energy during the day to reduced the amount of energy storage required at night (which is a major contributor to system mass). Note: as the solar-based systems are sized for the worst possible day, i.e. the day with the shortest insolation period / longest eclipse period, the energy provided by the solar-based system over the course of the surface mission is actually underestimated.

As can be seen in Figure 1, the work in this paper is focused on nuclear and photovoltaic power production architectures then with different options for secondary energy generation and energy storage. Specific technologies for each

architectural element were researched before performing analysis on each full architecture. The studied technologies are presented below.

3. SURFACE POWER GENERATION AND ENERGY STORAGE TECHNOLOGIES

Specific technologies for the architectures were researched in order to ascertain their level of readiness. A number of RTG technologies that are currently being developed by the NASA Science Mission Directorate [11] were assessed. Traditional rigid solar arrays (tracking) and newer thin film arrays (non-tracking) were considered for the solar-based options.

This section provides an overview of the different power generation and energy storage technologies considered in the architecture-level analysis. Performance assumptions and references are provided where possible.

Solar Power Generation Technology

Two technologies were considered here. They included ultra-light amorphous silicon rollout blanket arrays and high efficiency inflexible tracking arrays. The ultra-light arrays have efficiencies of 15% and mass/area of 0.063kg/m^2 [6]. These arrays have only been tested as small units so the TRL for a large system that would be needed for human surface exploration are lower than that for already existent inflexible systems. The high efficiency arrays are based on ISS arrays. They have 20% efficiencies and mass/area of 2.5 kg/m^2 . The structural overhead is based on ISS. Also, multi axis tracking was assumed for perpendicular solar flux incidence throughout the day.

An important added consideration for the ultra-light arrays is how to protect the rolled blanket from high winds. It was found that if the blankets are simply laid on the surface without any additional anchoring, a light wind of only 7.35 m/s would lift the arrays. Therefore a concept was developed to weigh down the arrays by adding Kevlar areas equal to 10% or the total array area in which rocks will be placed to weigh down the full array (see Figure 2). It was found that 9.2 kg/m^2 of rock is needed in the 10% Kevlar regions to secure the array against the top recorded Mars wind of 25 m/s . The major effect of this

consideration is increased deployment time which will be discussed below.

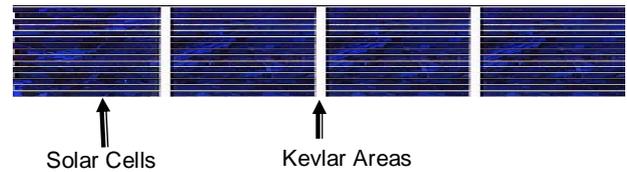


Figure 2: Ultra-light blanket arrays with Kevlar portions for rock placement

Battery Technology

Batteries can be used for both secondary power generation and for energy storage. Li-ion batteries were considered in this study for their high energy density and common use in aerospace systems. To be conservative, current performance numbers were used. The batteries have a mass-specific energy density of 150 Wh/kg and a volume-specific energy density of 270 kWh/m^3 .

Regenerative Fuel Cell Technology

Again regenerative fuel cell can perform both the tasks of secondary power generation and energy storage. Here hydrogen/oxygen regenerative fuel cells were considered. The fuel cells have mass-specific energy density of 250Wh/kg and volume-specific energy density of 200 kWh/m^3 [7]. It was assumed that the reactants were stored in tanks at 200 atm .

Nuclear Surface Primary Power Technology

Two designs were considered for nuclear primary power production in this study. Both are nuclear reactors with dynamic conversion. One design uses a brayton engine for the conversion and the other a Stirling engine. The brayton based design is adapted from the Prometheus design for a lunar based reactor. The radiator was resized for use in the Martian thermal environment. The brayton design must be located 210 m from base and have a 3.5 m effective regolith shield to mitigate radiation effects. The Stirling engine based design comes from JSC element/systems database [6]. It is composed of an SP-100 type reactor and 4 sterling engines. The Stirling design must be located 1km from the base and the reactor itself must be located below the surface.

Radioisotope Power Generation Technology

Dynamic conversion RTG systems can act as secondary power generation elements as well as

provide a redundant constant power source for added safety in the power system. Here we considered a design for modular general purpose heat sources (GPHS) coupled to Stirling conversion engines. This design has a mass specific power of 13.75 W/kg and volume specific power of 27500 W/m³ [6]. These units use PuO₂ for fuel and a 5kW unit would require 62.5 kg of fuel. A positive feature of this design is that they primarily have alpha-radiation emissions that can be easily blocked and thus these units could be located close to base.

4. QUANTITATIVE ANALYSIS MODELS

In order to compare all the architectures seen in Figure 1, a model was created to assess mass and volume required to provide sufficient power through the Martian day and night. The nuclear options were modeled directly from reference data available. The solar power options, however, required the creation of a new model. The major requirements driving this model are as follows. The arrays must be sized for end-of-mission power requirements. If several missions go to same site, supplementary arrays are brought each mission to make up for degradation. Arrays must also be sized to provide the required power during the year's minimum incident solar energy period.

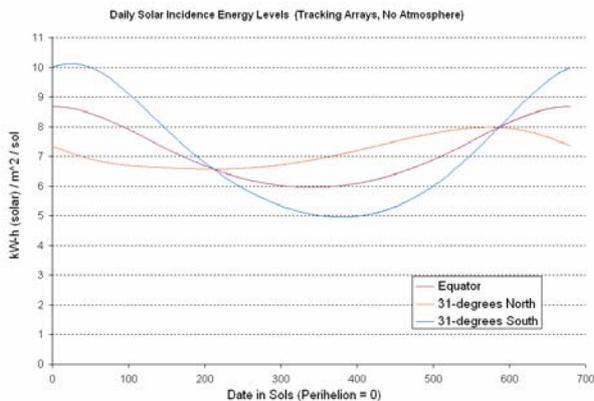


Figure 3: Mars solar incidence energy levels for three latitudes

The model also includes a number of important assumptions. An optical depth of 0.4 is assumed which is equivalent to hazy skies on Mars. Tracking arrays are multi-axis and keep incident flux perpendicular to array over the day. A nighttime power of 12 kW is assumed to be enough to sustain 6 crew. The daytime power requirement is not enforced until the sun is 12 degrees above the horizon. Also, initial analysis for all architectures was done for an equatorial location which is actually not the optimal location for solar power on Mars. Figure 3 shows the daily

solar incidence levels over time for three different latitudes. It is seen that some northern latitudes actually have a higher minimum solar incidence over the year. In fact 31 degrees north has the highest minimum incident energy compared to the rest of Mars.

After an initial performance analysis was performed on each architecture, the more feasible architectures were then looked at in the context of performance change as a function of latitude location.

The steps taken in the modeling process are outlined below in Table 1.

Table 1: Procedure for modeling custom TMI stages

Step #	Description
Step 1.	Calculate total energy in Joules that must be produced by the solar arrays in a day based on the days power requirement
Step 2.	Calculate the power per unit area being produced by the solar array as the sun sweeps the sky on the given latitudes minimum solar energy day based on the array's end of life characteristics
Step 3.	Integrate to find the total energy that a square meter array can produce over the day
Step 4.	Comparing the energy produced by a square meter and the total energy required find the needed array area for the system
Step 5.	Calculate the mass and volume for this array area
Step 6.	Based on night time energy requirements calculate the mass and volume of the secondary energy production components

5. DISCUSSION OF ANALYSIS RESULTS

Results show that architectures which include thin film rollout solar arrays and either RFCs or Li-ion batteries can be competitive with nuclear based options. Architectures with RFCs come especially close to matching the mass based performance of nuclear reactors with Stirling engines for dynamic conversion at higher power levels (see Figure 4). This is true at higher power levels because the ultra-light solar arrays begin to dominate the more massive secondary power generation components. Looking at volume based performance it is seen that all thin film solar architectures dominate the nuclear options (see Figure 5). All tracking array architectures are non-competitive on both a mass and volume basis. All solar based options were also included in architectures where 5kW RTGs were included. These architectures see a slight

performance boost over their non-RTG counterparts, but the performance increase is small and the major benefit of the RTG is still the added safety that a continuous power supply imparts. Figure 6 gives a 100kW point design comparison for the competitive architectures.

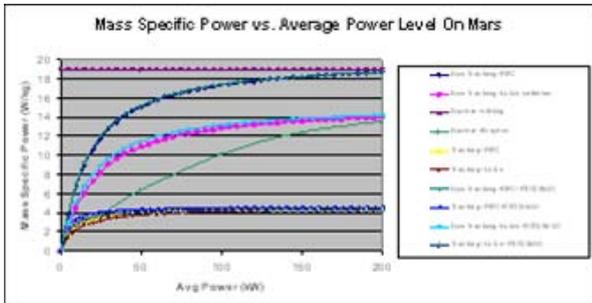


Figure 4: Mass specific power performance versus average power level for all architectures

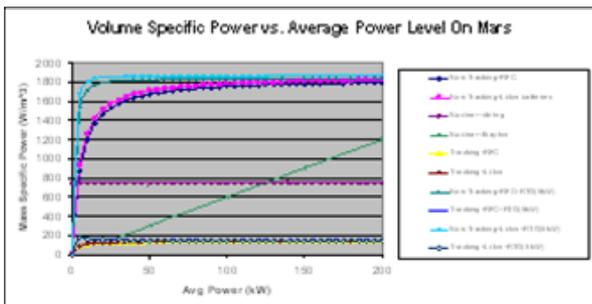


Figure 5: Volume specific power performance versus average power level for all architectures

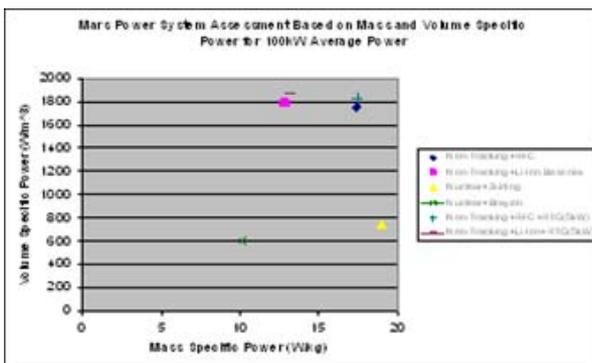


Figure 6: Mass and volume specific power performance for a 100kW average power system for the feasible architectures

Now that thin film solar architectures with RFCs or Li-ion batteries have been singled out as the interesting competitive architectures with nuclear options, it is interesting to look at the effect of latitude location on the power systems' performance. This way, more suitable locations

for solar based architectures can be assessed. Taking in the planet's axial tilt and orbital elements about the sun, the minimum solar energy flux based on latitude can be found. Figures 7 and 8 then present the mass and volume based performance of the power architectures for a range of Mars latitudes. The results show that there is an optimum location for solar architectures around 30 degrees north. The results also show that northern latitudes are always better than their southern counterparts.

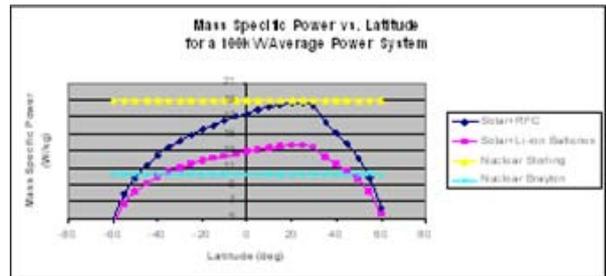


Figure 7: Mass specific power performance for interesting architectures as a function of latitude

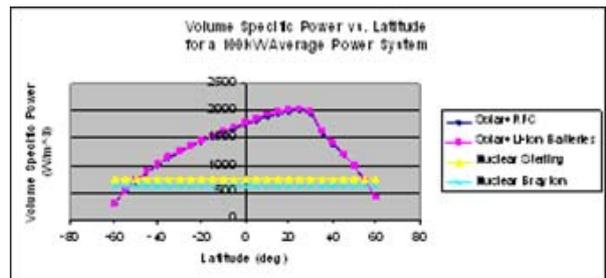


Figure 8: Volume specific power performance for interesting architectures as a function of latitude

Aside from mass and volume based performance, deployment time of these very large arrays (25,000 m² for a 100kW equatorial system) is very important. Deployment time includes off-loading of the arrays, unrolling the arrays, and finally placing rocks to weigh down the arrays. For this analysis we considered the 100kW average power system located at the Mars equator in order to get an estimate for deployment time. This requires a 25,000 m² rollout array field which includes the addition of the Kevlar areas for wind mitigation. It was assumed that array blankets are 2m wide and weigh 80lbs for easy storage and handling by two astronauts. With 0.07 kg/m² as the expected array density, only 18 blankets are required. If we assume astronauts can unroll array at a walking speed of 1m/s, the unrolling requires only 7 hrs. Time will also be needed for unloading, positioning, and hookup of arrays. If it is assumed that 1 hr for this for each array is needed, this adds 18 hrs. In addition to this rocks must be placed in the Kevlar areas. Assuming

Kevlar areas are 1ft in length and the complete 2m width, 5.6 kg of rock in each area is needed. There are 225 of these Kevlar areas per array so a total of 4050 of these areas. Assuming 2 rocks are needed per area to secure the 2 sides of the array this requires 8100 rocks to be placed. If 30 seconds is needed to pick and place a rock this will take 33.75hrs for 2 crew. All of this results in a total of 66hrs to deploy the solar array field by two crew members.

Power must also be provided during the deployment process. It is interesting to note however, that deployment gives 0.76 kW per man hour; therefore we only need 13.2 man hours to reach a capability of 10 kW which is enough for minimal stay alive power. To be very conservative, we can neglect this and find out what additional fuel cells or batteries are needed to get through the deployment period. If you say full deployment and initial usefulness takes 1 week, we need either a 10kW RTG or fuel cell system to provide 10kW power over the week. The RTG system would be approximately 1200kg and 0.6 m³. A RFC system would need 2400kg system with volume 8.4 m³. This is overly conservative however, and in fact little more than fully charged night-time power generation would be required as 2 crew could achieve the needed 10kW in less than 7hrs.

6. SUMMARY AND CONCLUSION

A systematic comparative of surface power systems for human Mars mission was carried out, including nuclear fission, radioisotope, and solar power generation technologies. The metrics considered were mass-specific average system power and volume-specific average system power; both were calculated based on an equal-energy analysis for each of the architecture options considered.

The analysis results indicate that over the entire range of average surface power levels considered, solar-power systems based on thin-film arrays with batteries or regenerative fuel cells are comparable in performance to nuclear-fission-based architectures. Thin-film-based solar architectures provide sufficient power even during contingency situations such as global dust storms, and they appear to require only very limited time to deploy and maintain on the surface of Mars.

It is important to note that significant development of photovoltaic power generation

and energy storage capabilities can be expected in the next decades for Earth applications, which would be available virtually free of investment for human Mars exploration. The associated performance gains will make solar surface power even more competitive with nuclear fission systems; this indicates that solar-based Mars surface power systems should be seriously considered as an alternative to nuclear surface power.

ACKNOWLEDGEMENTS

This paper was prepared at the Massachusetts Institute of Technology, Department of Aeronautics and Astronautics, under a research grant from NASA's Exploration Systems Mission Directorate (ESMD). The authors would like to thank NASA for the support of this work.


REFERENCES

- [1] Hoffman, S., Kaplan, D. (editors), The Reference Mission of the NASA Mars Exploration Study Team, NASA SP-6017, Johnson Space Center, Houston, Texas, 1997.
- [2] Drake, B. G. (editor), Reference Mission Version 3: Addendum to the Human Exploration of Mars, NASA SP-6017-ADD, Johnson Space Center, Houston, Texas, 1998.
- [3] Draper/MIT CE&R Study: Final Report, Cambridge, MA, September 2005.
- [4] Connolly, J., Joosten, K., Human Mars Exploration Mission Architectures and Technologies, NASA, Houston, January 2005.
- [5] Zubrin, R., et al., Mars Direct: A Simple, Robust, and Cost Effective Architecture for the Space Exploration Initiative, AIAA-1991-329-394.
- [6] Hanak, J.J., Fulton, C., Myatt, A., Nath, P., Ultralight Amorphous Silicon Alloy Photovoltaic Modules for Space and Terrestrial Applications, American Chemical Society, V3, 1986.
- [7] Burke, Kenneth A., Fuel Cells for Space Science Applications, NASA/TM—2003-212730, 2003.
- [8] Planet Surface Systems Office JSC, Elements/Systems Database, JSC-45107, 1991.
- [9] Schmitz, Paul C., Penswick, L. Barry, Shaltens, Richard K., A Design of a Modular GPHS-Stirling Power System for a Lunar Habitation Module, NASA/TM—2005-213991, 2005.
- [10] McKissock, BI, Kohout, LL, A Solar Power System for an Early Mars Expedition, NASA TM 103219, August 1990.
- [11] Shaltens, RK, Wong, WA, Advanced Stirling Technology Development at NASA Glenn Research Center, NASA Science Technology Conference, Session D2 – Space Power, June 18, 2007.
- [12] Withrow, CA, Morales, N., Solar Electrochemical Power System for a Mars Mission, NASA TM 106606, December 2004.


APPENDIX

Full-size version of Figure 3: Mars solar incidence energy levels for three latitudes:


Daily Solar Incidence Energy Levels (Tracking Arrays, No Atmosphere)

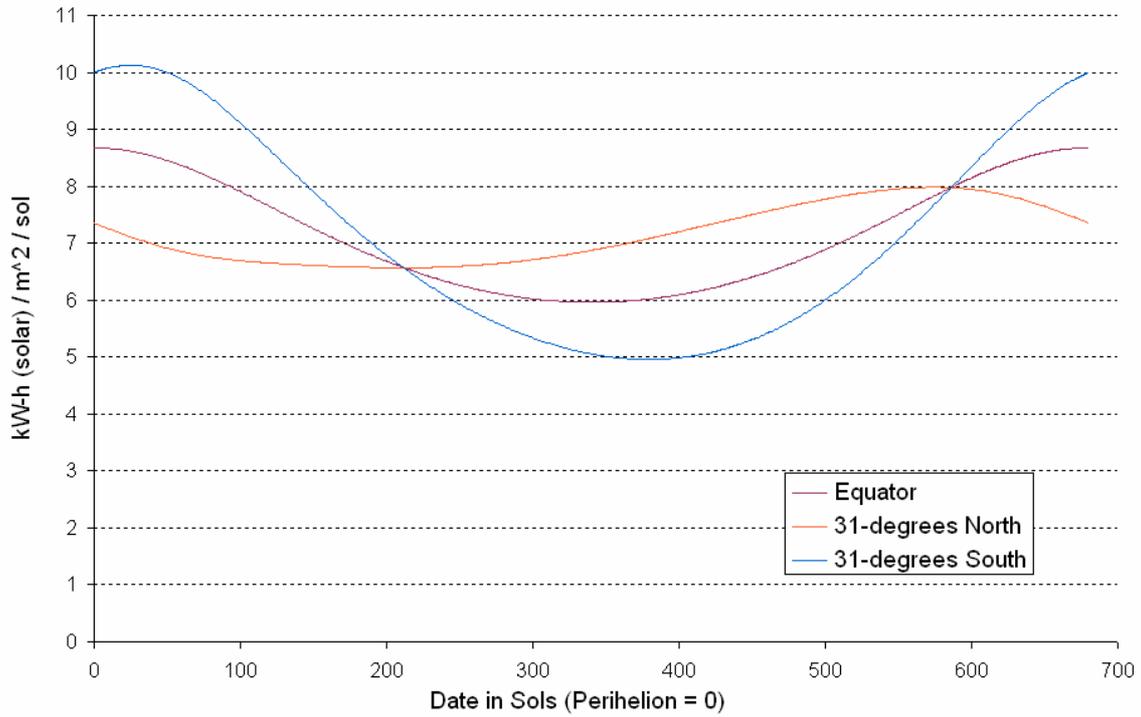


Full-size version of Figure 4: Mass specific power performance versus average power level for all architectures

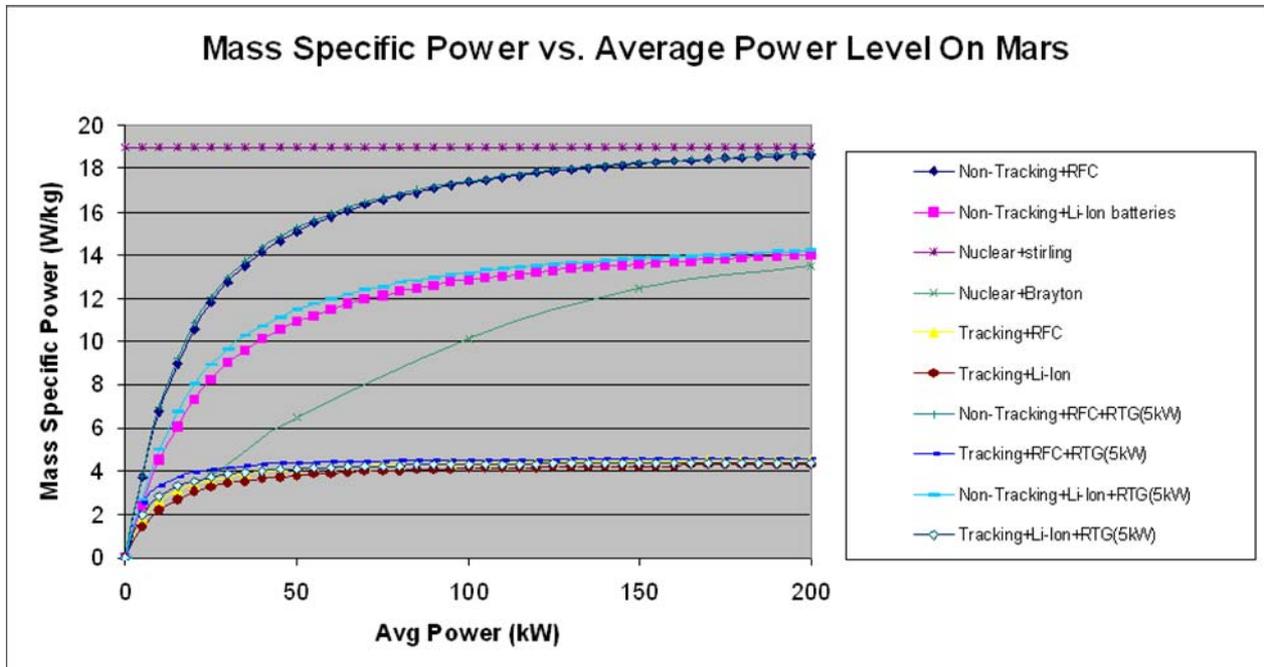


Full-size version of Figure 5: Volume specific power performance versus average power level for all architectures

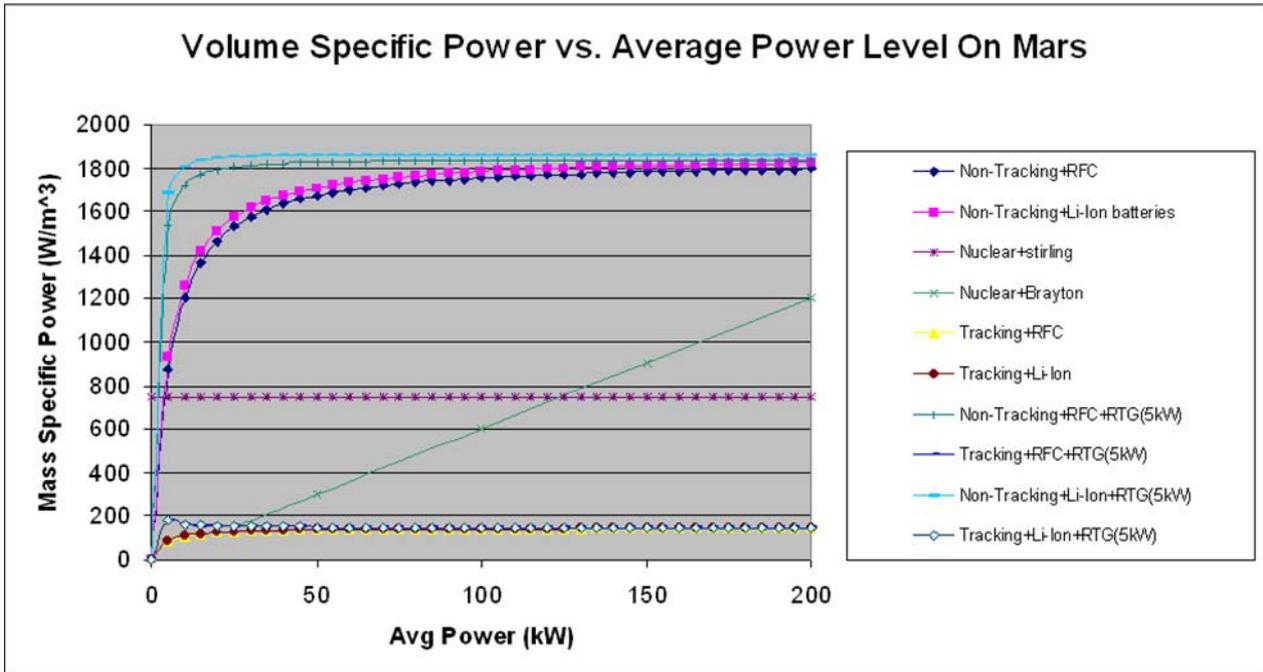

Full-size version of Figure 6: Mass and volume specific power performance for a 100kW average power system for the feasible architectures

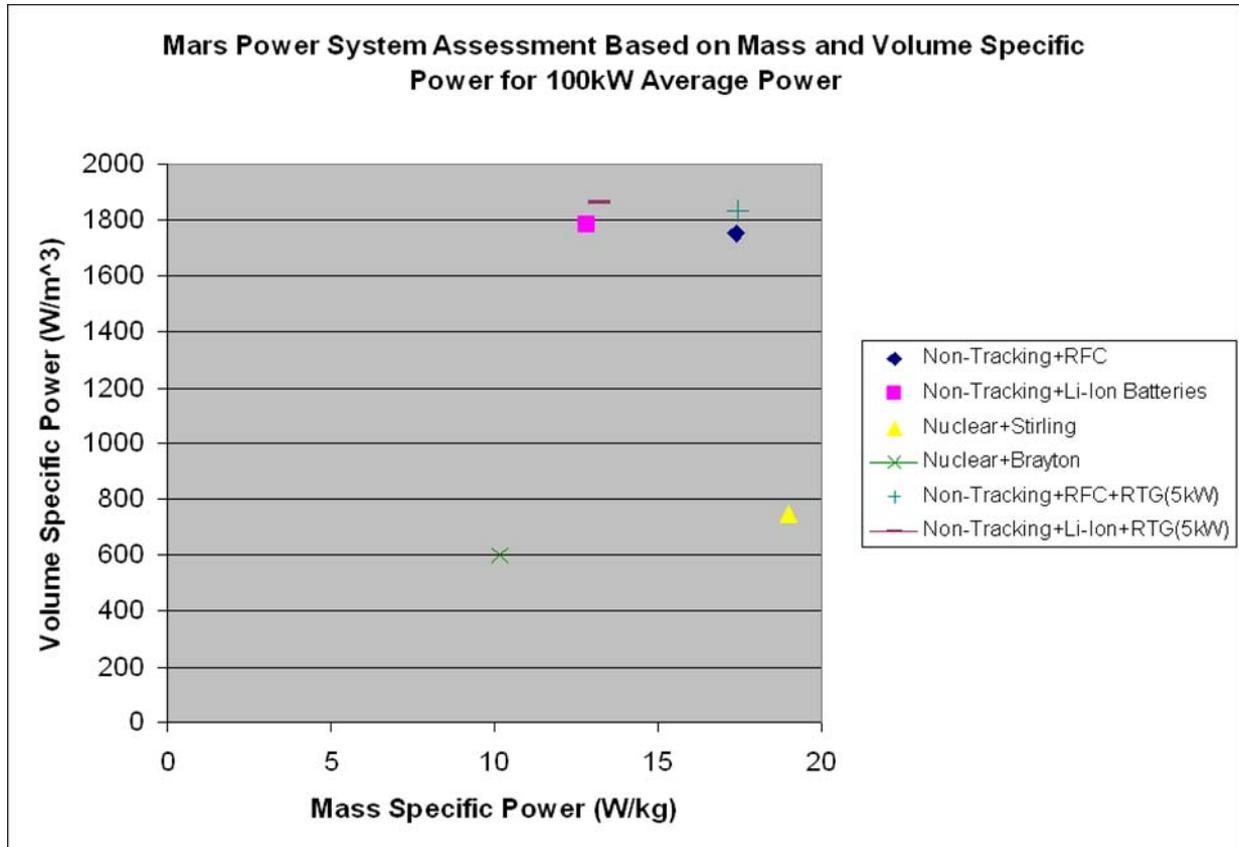

Full-size version of Figure 7: Mass specific power performance for interesting architectures as a function of latitude

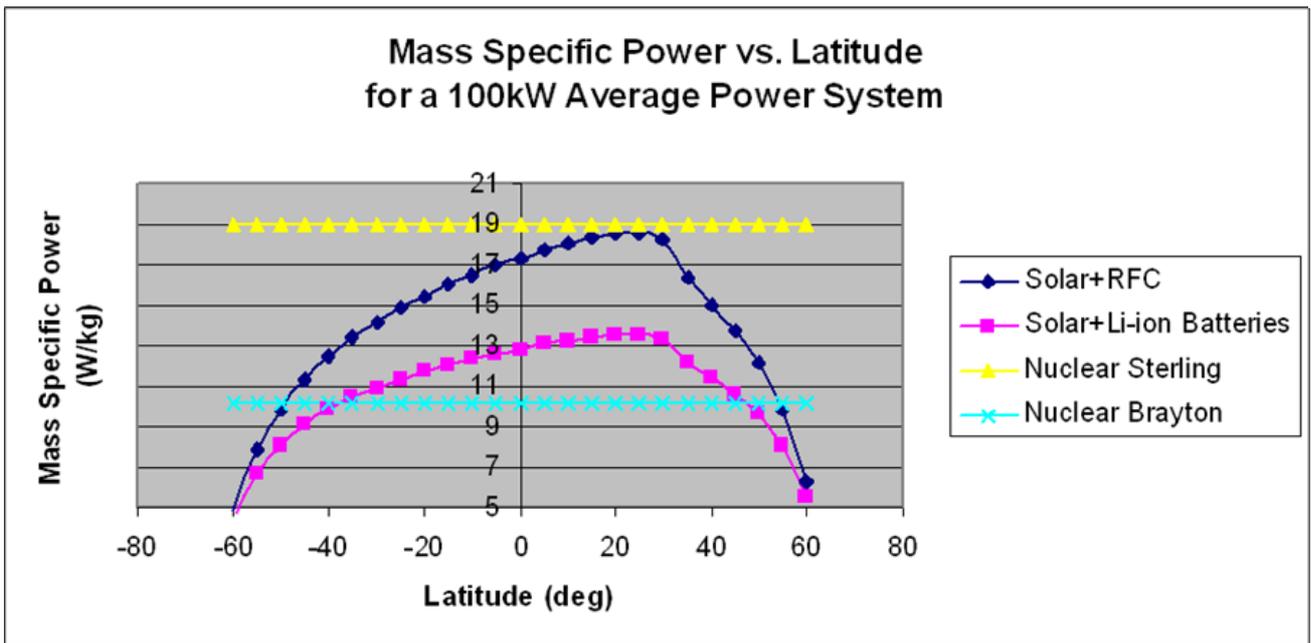

Full-size version of Figure 8: Volume specific power performance for interesting architectures as a function of latitude

